

FIELDS OF APPLICATION FOR WASTE CONVEYORS


- MODEL SERIES 2008 -

on BUSCH punching machines




KF 110

on three-knife trimmers, direct

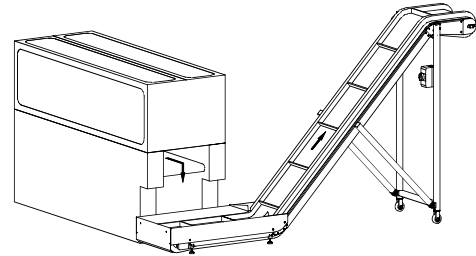


KF 145-80

on three-knife trimmers with internal conveyor or waste chute

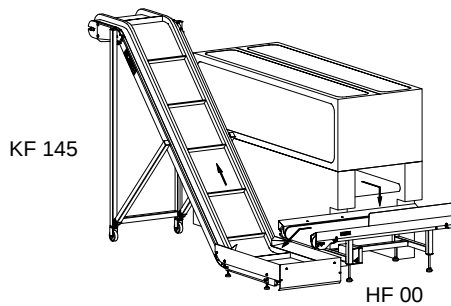

KF 145


HF 00

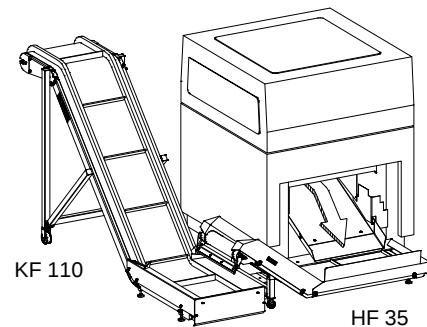

KF 110


HF 35

on guillotines with or without automatic waste removal device (ASE)

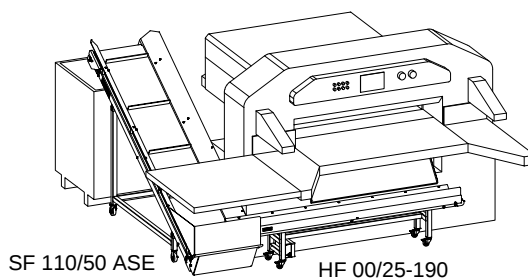


SF 110/50 ASE

HF 00/25-190

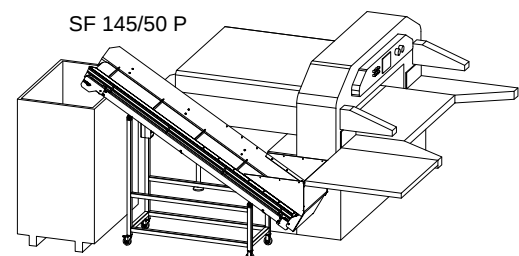


SF 145/50 P

on flat-bed die-cutters

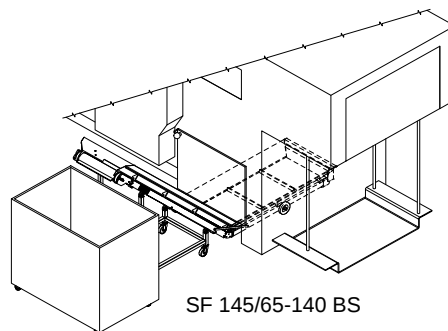

SF 145/65-140 BS

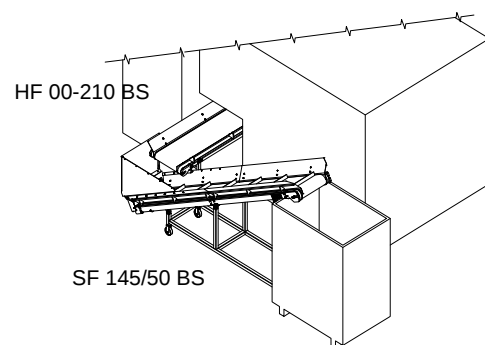

HF 00-210 BS


SF 145/50 BS

- for the removal of paper and board waste from waste chutes into containers.
- the installation of BUSCH waste conveyors achieves staff saving.

Types



Type KF

for BUSCH punching machines
for three-knife trimmers

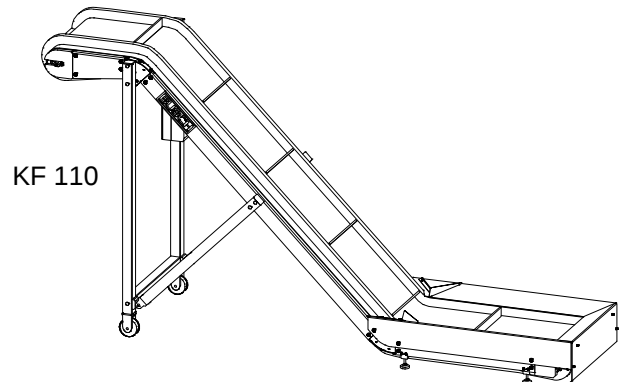


Type HF

for three-knife trimmers
for guillotines
for flat-bed die-cutters

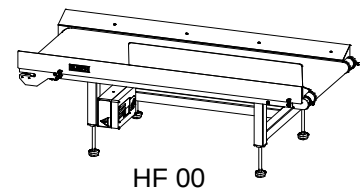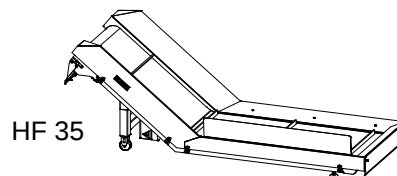

Type SF

for guillotines
for flat-bed die-cutters

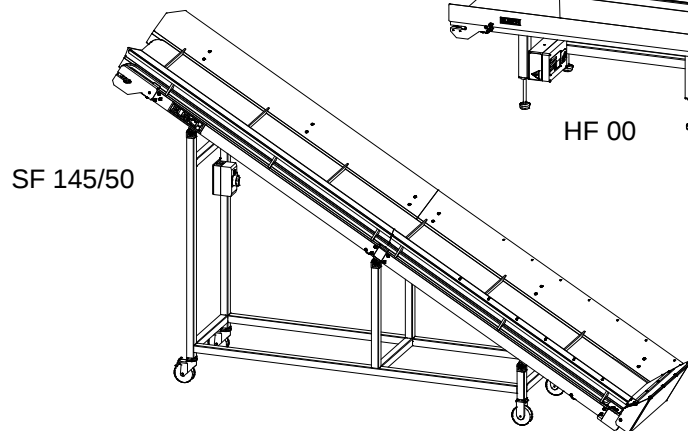

Technical Data

Type		KF	HF	SF
Conveying height	mm	1100, 1450, 1750	-	1100, 1450, 1750, 1900
Length of delivery chute	mm	600, 800	-	-
Transport length	mm	-	800 - 3900	-
Width of conveyor belt	mm	500	250 / 500	500 / 650
Usable width of conveyor belt	mm	340	200 / 385	400 / 550
Conveying speed	m/s			
- with 50 Hz		0,4	0,3 and 0,4	0,4
- with 60 Hz		+ 20 %	+ 20 %	+ 20 %
Power requirements (3-phase)	kW	0,25	0,1	0,25
Power consumption 230/400V	A	1,0	0,25	1,0
Net weight	kg	88 - 120	43 - 79	88 - 190